



HDMI[™]
HIGH-DEFINITION MULTIMEDIA INTERFACE

4 to 1 HDMI Switch

english


Introduction:

Thank you for your purchase of the 4-port HDMI Switch with IR remote controller! You now have a high quality, durable device that enables you to connect up to four HDMI devices such as e.g. DVD players, Set-Top-Boxes, etc. to one TV, monitor or projector device with HDMI interface.

Features:

- Plug & Play installation
- Easy switching between the four HDMI sources by using the IR remote controller or the switch button of the HDMI switch
- Supports 480i/ 480p, 720i/ 720p, 1080i/ 1080p resolution; compatible with HDCP
- LED display that shows the connected HDMI devices
- Auto-Detect of all connected HDMI devices
- Auto-Switch to the first available HDMI input signal after power on
- Auto-Switch to the last used input signal after Stand By
- Supports Hot-Swap-Connection of HDMI input devices


IR Remote Control:

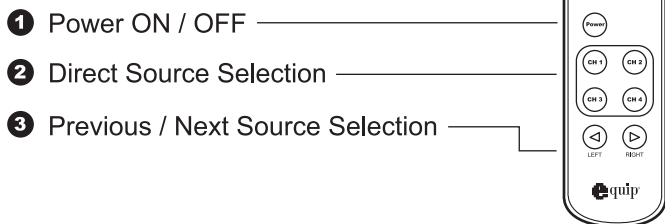


- Front View:**
- ① Source LED Indicator
 - ② IR Receiver
 - ③ Switch / Power Button
 - ④ Power LED Indicator




- Rear View:**
- ① Power Jack
 - ② HDMI Output
 - ③ HDMI Input

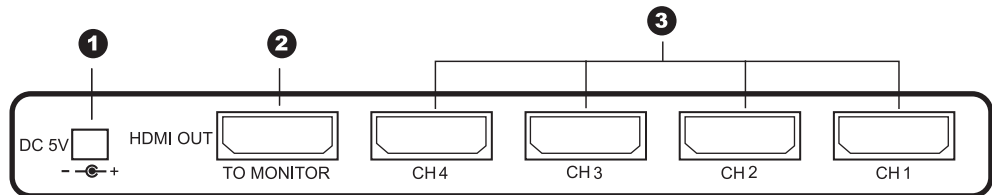


Package Contents:

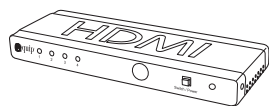


HDMI Switch



IR Remote Control




AC/DC Adapter



Manual

Installation Examples:

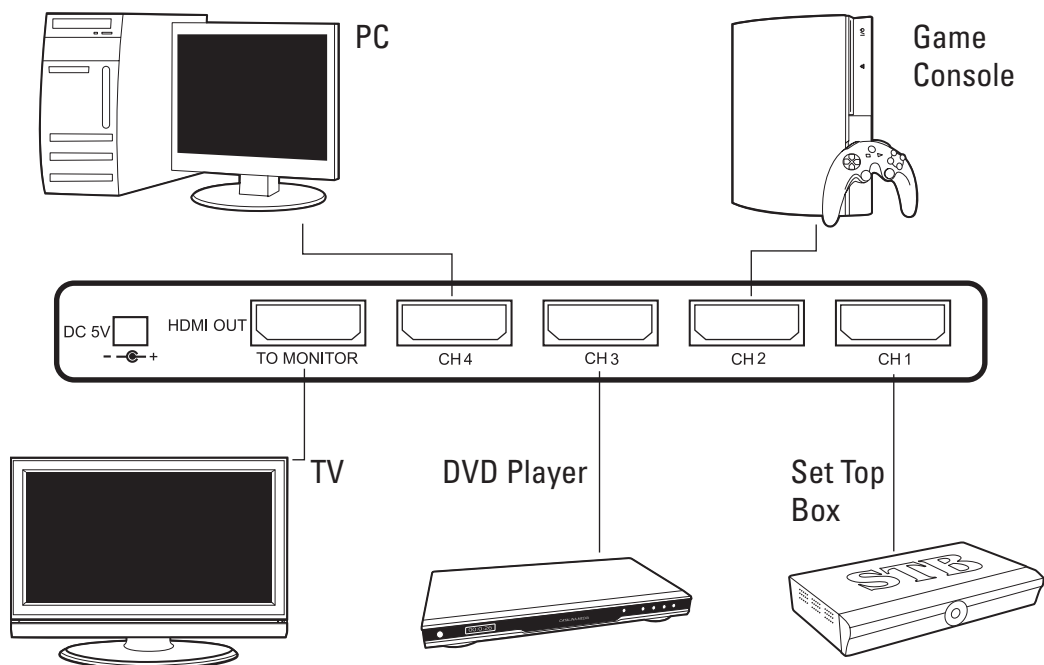

Installation:

- Plug in the AC/DC power supply to the power jack of the switch; then connect it to a power outlet
- Connect the HDMI cables from the source devices e.g. DVD player, Set-Top-Box, etc. into one of the HDMI input ports
- Connect the HDMI cable for the output device first into the output port of the switch and then into the HDMI input port of your TV, monitor or projector

Operation:

Power on or off the HDMI Switch:

- Press and hold the „Switch/Power“ key on the HDMI Switch until the „Power“ indicator LED turns on or off
- Press the „Power“ key on the IR remote controller to turn on or off the HDMI Switch

Select desired HDMI source port by the front panel of the HDMI Switch:

Press the „Switch/Power“ key on the HDMI Switch repeatedly to switch between port one to port four in sequenz; the red LED indicator will turn on for easy distinguish of the selected channel

Select desired HDMI source port by the IR remote controller of the HDMI Switch:

Press the number 1~4 key on the IR remote controller to select the desired channel directly or press the „<“ or „>“ key to select previous / next channel

Auto-Switching function:

After power on the HDMI Switch, when any of 4 connected HDMI source devices are on and outputting „Live“ HDMI signals to the HDMI switch, the HDMI switch will automatically select the „Live“ HDMI channel.

Last-Channel-Memory function:

After power on the HDMI Switch without receiving any „Live“ HDMI signals from the source devices, the HDMI Switch will automatically switch to the last used channel.

Special Note:

Please be carefull when selecting your HDMI connection cables - non certified HDMI cables may affect your signal and display quality!